


## 40 Series Horizontal Liquid Level Sensor

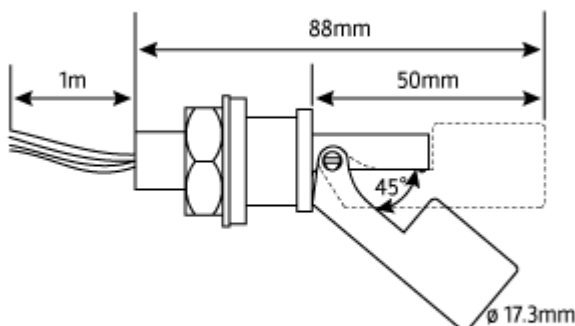

- Horizontally mounted miniature liquid level sensors designed for internal or external tank mounting.
- The design provides for a cost-effective solution where high reliability in a demanding environment is called for.
- Available in PVC, Polypropylene, PPS and Nylon materials to permit use in most chemical and temperature environments.
- By rotating the body through 180° it is possible to sense for high or low conditions.
- This design is ideal for food, automotive, petroleum, chemical and laboratory applications.
- Available with form A (SPST) or form C (SPDT) contacts.
- The weight of the sensor is approximately 35g.
- A 1 metre PVC cable is provided as standard, for custom cable lengths, contact sales office.

### Technical Data

	<b>PVC</b>	<b>Nylon</b>	<b>Polypropylene</b>	<b>PPS</b>
<b>Minimum liquid Specific Gravity</b>	0.8	0.7	0.7	0.9
<b>Maximum Pressure</b>	2 bar	2 bar	2 bar	2 bar
<b>Operating Temperature</b>	-20°C to +65°C	-20°C to +120°C	-20°C to + 80°C	-20°C to +125°C

### Switch Contact Ratings

Form A switches are rated at 240v AC/DC, 1.0 Amp resistive load only.

Form C switches are rated at 60v DC, 0.25 Amp resistive load only.

For other loads i.e. capacitive, inductive or incandescent lamps please contact Deeter for advice.

For AC circuits ensure the peak voltage x current does not exceed the power rating.

All PPS switches have 7/0.2 PTFE insulated wires.

PVC, Nylon and PP form A switches have 16/0.2 PVC insulated wires.

PVC, Nylon and PP form C switches have 7/0.2 PVC insulated wires.

### Deeter Electronics Ltd.

Deeter House, Valley Road  
Hughenden Valley  
Bucks, HP14 4LW

Tel: +44 (0) 1494 566 046

Fax: +44 (0) 1494 563 961

Email: [sales@deeter.co.uk](mailto:sales@deeter.co.uk)

[www.deeterelectronics.com](http://www.deeterelectronics.com)


## 40 Series Horizontal Liquid Level Sensor

### Fixing

	Hole Size	Torque	Wall Thickness
<b>M16 external mount</b>	23mm	2.7Nm	6mm max
<b>M16 internal mount</b>	16.5mm	6.8Nm	10mm max
<b>Internal 3/8" NPT</b>	To suit	6.8Nm	16mm max
<b>External 1/2" NPT</b>	To suit	6.8Nm	12mm max

Caution: NPT threads are specified in their reference size.  
This size does not refer to the physical thread diameter.

### Ordering Code

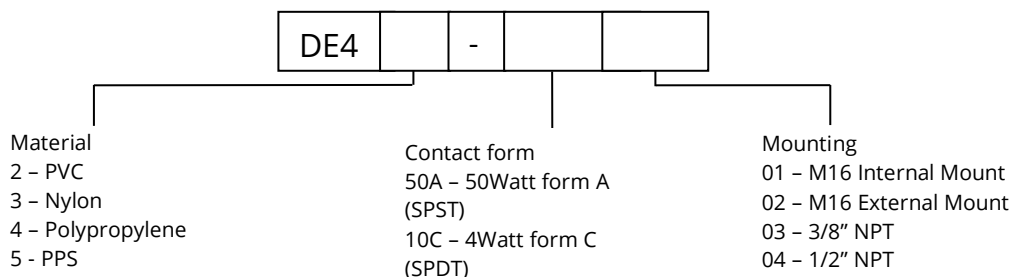

Example:

DE43-50A01 = 40 Series, Material Nylon, M16 internally mounting thread, 50 Watt Form A SPST float switch.

**All electrical equipment should be installed by a qualified/certified electrician. Reed Switches are easily damaged by inductive loads. Please ensure adequate electrical protection is in place before use.**

Deeter Electronics Ltd follows a policy of continual development of its products and reserves the right to change specifications and/or features without notice.