


BA307E-SS Rugged Intrinsically Safe 2-wire 4-20mA 4 digit Indicator

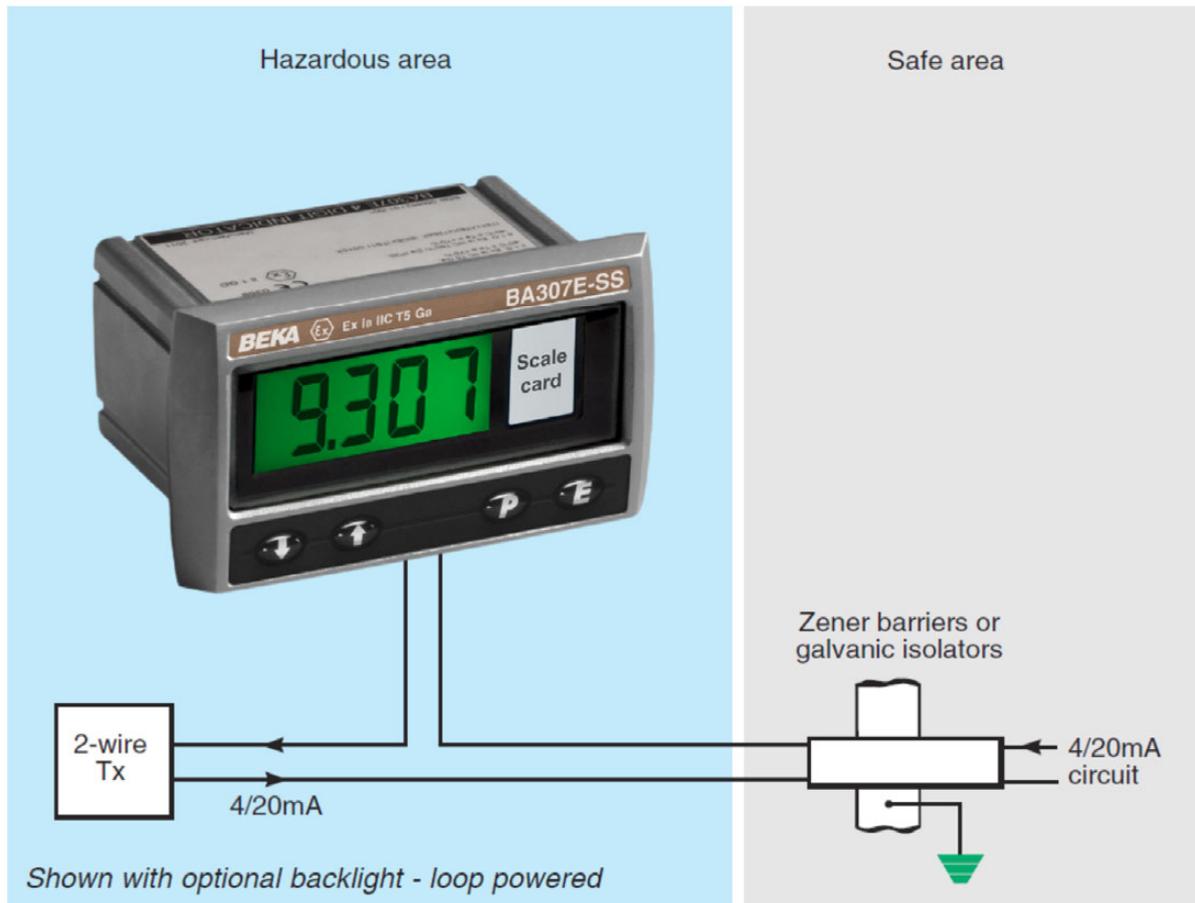

- Intrinsically safe for use in Zone 1 Ex e or Ex p panel enclosures and in harsh marine environments
- Rugged IP66 Stainless Steel enclosure
- Intrinsically safe Ex ia ATEX, FM, cFM and IECEx
- Front of indicator maintains Ex e, Ex p and Ex t enclosure certification
- Loop Powered – only 1.2V drop
- 4 digit 15mm high display
- Root extractor and 16 segment lineariser
- Optional backlight & alarms
- Easy on-site scale card installation
- 3 year guarantee

BA307E-SS Rugged Intrinsically Safe 2-wire 4-20mA 4 digit Indicator

The BA307E-SS intrinsically safe, panel mounting loop powered Indicator has a rugged stainless steel housing allowing it to be safely installed in an Ex e or Ex p panel, in marine environments or where the front of the instrument is likely to be impacted. The indicator has a full 4 digit display with guaranteed performance between -40 and 70°C. The scale card can easily be marked to show the units of measurement and can be installed on-site without dismantling the instrument or removing it from the panel.

Main application of the BA307E-SS is to display a measured variable in engineering units when mounted in an Ex e or Ex p panel enclosure located in Zones 1 or 2. The front of the indicator has IP66 ingress and impact protection which allows it to be installed in a certified Ex e or Ex p panel enclosure without invalidating the enclosure certification. The indicator's rugged stainless steel housing and 10mm thick toughened glass window also make the BA307E-SS ideal for intrinsically safe applications in marine environments or where the front of the instrument is likely to be impacted.

The bold 15mm high 4 digit display provides maximum contrast and has a wide viewing angle, allowing the BA307E-SS to be easily read in most lighting conditions over a wide temperature range. An optional factory fitted backlight is available for applications in poorly illuminated areas. The four digits, with three decimal point positions and a negative sign, may be configured to display any variable between -9999 and 9999.

International intrinsic safety certification allow the BA307E-SS to be installed worldwide. The 4/20mA input terminals comply with the requirements for simple apparatus which, together with the low voltage drop, permit connection to most intrinsically safe circuits.

For applications in combustible dusts the BA307E-SS may be installed in a certified Ex t panel enclosure without invalidating the enclosure's certification.

A backlight which may be loop or separately powered is available as a factory fitted option. It provides green background illumination allowing the display to be read at night or in poorly illuminated areas. When powered from the 4/20mA loop no additional intrinsically safe interface or wiring are required and the indicator input remains compliant with the requirements for simple apparatus. Powering from a separate supply produces a brighter backlight but requires an additional intrinsically safe interface. Two backlights may be separately powered from one intrinsically safe interface.

Optional dual alarm outputs which can switch hazardous or safe area loads, such as sounders, beacons or solenoid valves are available as a factory fitted option. The two galvanically isolated

BA307E-SS Rugged Intrinsically Safe 2-wire 4-20mA 4 digit Indicator

solid state alarm outputs may be independently configured as high or low alarms with normally open or closed outputs. Annunciators on the display show the status of both outputs.

Units of measurement may be shown on the scale card which is visible through the window on the right hand side of the display. Instruments are supplied with the units legend requested when ordered, but the scale card may be easily changed on-site without removing the BA307E-SS from the panel or opening the instrument enclosure.

Other models in this range include the BA327E-SS which has a similar specification with five 11mm high digits and a 31 segment bargraph.

Specification

Input

Current	4 to 20mA
Voltage	Less than 1.2V at 20°C Less than 1.3V at -40°C Less than 5V with optional loop powered backlight
Overrange	±200mA or ±30V will not damage the indicator

Display

Type	Liquid Crystal, non-multiplexed 4 digits 15mm high
Span	Adjustable between 0 & ±9999 for a 4-20mA input
Zero	Adjustable between 0 & ±9999 with 4mA input
Decimal point	1 of 3 positions or absent
Polarity	Automatic minus sign
Zero blanking	Blanked apart from 0 in front of decimal point
Direction	Display may increase or decrease with increasing 4-20mA input
Reading rate	2 per second
Overrange	9999 or -9999 with all decimal points flashing

BA307E-SS Rugged Intrinsically Safe 2-wire 4-20mA 4 digit Indicator

Push buttons	<i>(Function in display mode)</i>
▼	Shows display with 4mA input
▲	Shows display with 20mA input
'P'	Displays unit in mA or % of span, has a modified function when alarms are fitted
'E'	Used for tare function

Accuracy at 20°C

Linear	±0.02% of span ±1 digit
Root extracting	±16µA at input ±1 digit
Temperature effect on:	
Zero	Less than 25ppm of span/°C
Span	Less than 50ppm of span/°C
Series mode rejection	Less than 0.05% of span error for 1mA pk to pk 50 or 60Hz interference

Intrinsic Safety

Europe ATEX

Code	Group II Category 1GD Ex ia IIC T5 Ga Ex ia IIIC T80°C Da IP20 Ta = -40 to 70°C
Input parameters	
Ui	30V dc
Ii	200mA
Pi	0.84W
Output parameters	Complies with requirements for <i>simple apparatus</i>
Cert. No.	ITS11ATEX28077X (Special conditions permit installation in Ex e, Ex p and Ex t enclosures and apply for use in Group IIIC conductive dusts)

USA FM

Standard	3610 Entity
Code	CL I: Div 1: Gp A, B, C, & D CL I: Zone 0: AEx ia IIC T5 @ 70°C <i>May be installed in an AEx e, AEx p or AEx n panel without invalidating panel's certification.</i>
Standard	3611 Nonincendive
Code	CL I, II, III: Div 2: Gp A, B, C & D CL I: Zone 2: Gp IIC T5 @ 70°C
File	3041487
Canada cFM	
File	3041487C

BA307E-SS Rugged Intrinsically Safe 2-wire 4-20mA 4 digit Indicator

Intrinsic Safety (cont.)

International IECEx

Code	Ex ia IIC T5 Ga Ex ia IIIC T80°C Da IP20 Tamb = -40 to 70°C
Cert. No.	IECEx ITS11.0048X (Special conditions permit installation in Ex e, Ex p and Ex t enclosures and apply for use in Group IIIC conductive dusts)

Environmental

Operating Temperature	-40 to 70°C
Storage Temperature	-40 to 85°C
Humidity	to 95% at 40°C noncondensing
Vibration	Report available
Enclosure	
Ingress Protection	Front IP66, rear IP20
Material	Stainless steel BS 3146-2:1977 ANC4B (316)
EMC	Complies with 2004/108/EC


Mechanical

Terminals	Screw clamp for 0.5 to 1.5mm ² cable, removable terminal blocks
Weight	0.85kg


Accessories

Backlight	Green, may be loop or separately powered
Loop powered	Indicator input voltage increased to 5V max.
Separately powered	9V at 22mA from IS interface
Alarms	Two alarm outputs, each of which may be independently configured as a high or low alarm contact with a NO or NC output
Output	Isolated solid state switch complying with requirements for simple apparatus
R _{on}	5Ω + 0.7V max
R _{off}	1MΩ min
Printed scale card	Blank card fitted to each Indicator can be supplied printed with specified units of measurement.
Pack of printed scale cards	Contains 28 common units of measurement and 2 blank cards
Tag legend	Specified tag number or application information etched onto rear of the instrument
Support plate	Evenly distributes clamping force when the indicator is installed in a non-metallic or thin panel less than 1mm thick.
BA495 rear cover and sealing kit	Provides impact and IP66 protection for rear of instrument

BA307E-SS Rugged Intrinsically Safe 2-wire 4-20mA 4 digit Indicator Dimensions

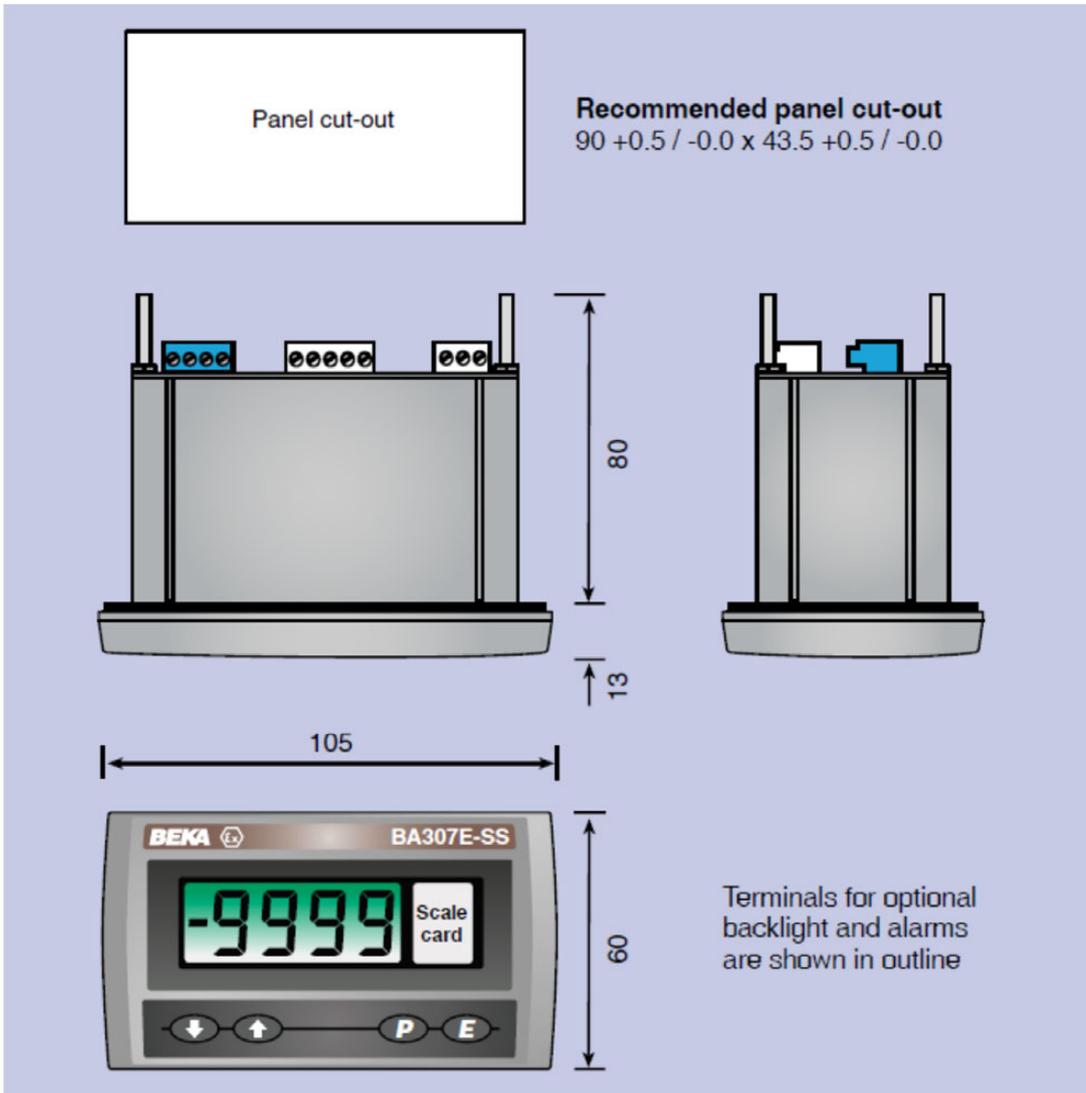

Terminal Connections

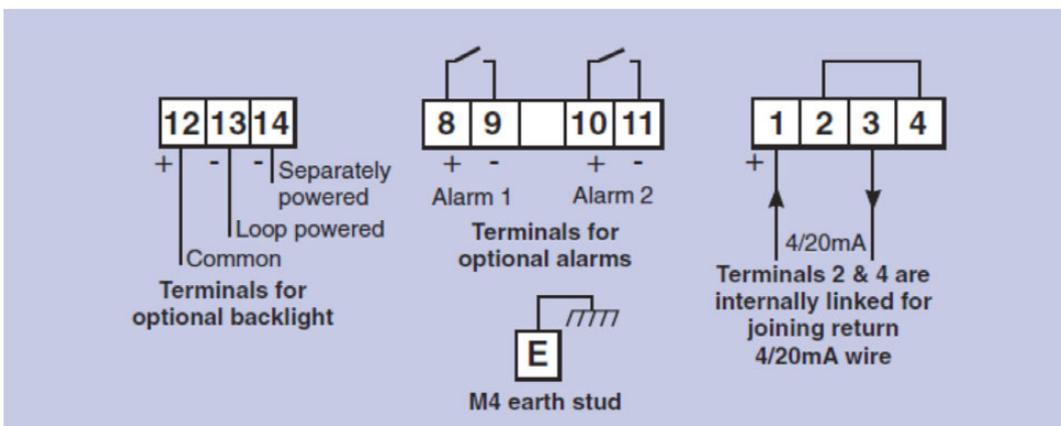

BA307E-SS Rugged Intrinsically Safe 2-wire 4-20mA 4 digit Indicator

Ordering Information

Model Number	Please specify BA307E-SS
Display mode	Linear, root or lineariser <i>Will be set to display 0.0 at 4mA and 100.0 at 20mA with a linear display if calibration information is not supplied. Can easily be recalibrated on-site.</i>
Display at:	
4.000mA	<i>Include position of decimal point & sign if negative, plus intermediate points if linearization is required</i>
20.000mA	
Accessories	Please specify if required
Display backlight	Backlight
Dual alarms	Alarms
Scale card	Legend required
Tag	Legend required
Support plate	Legend required
Rear cover and sealing kit	BA495